




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G11B 7/125, 7/24, 7/26, 7/00, 11/10		A1	(11) International Publication Number: WO 99/52103
			(43) International Publication Date: 14 October 1999 (14.10.99)
(21) International Application Number: PCT/KR99/00164		(81) Designated States: CN, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 3 April 1999 (03.04.99)			
(30) Priority Data: 1998/11893 3 April 1998 (03.04.98) KR		Published With international search report.	
(71) Applicant (for all designated States except US): SAMSUNG ELECTRONICS CO., LTD. [KR/KR]; 416, Maetan-dong, Paldal-gu, Suwon-city, Kyungki-do 442-373 (KR).			
(72) Inventor; and (75) Inventor/Applicant (for US only): SEO, Jin, Gyo [KR/KR]; 23/4, 55-2, Weolgye 1-dong, Nowon-gu, Seoul 139-051 (KR).			
(74) Agent: LEE, Young, Pil; The Cheonghwa Building, 1571-18, Seocho-dong, Seocho-gu, Seoul 137-073 (KR).			

(54) Title: ADAPTIVE RECORDING METHOD AND APPARATUS FOR HIGH-DENSITY OPTICAL RECORDING APPARATUS

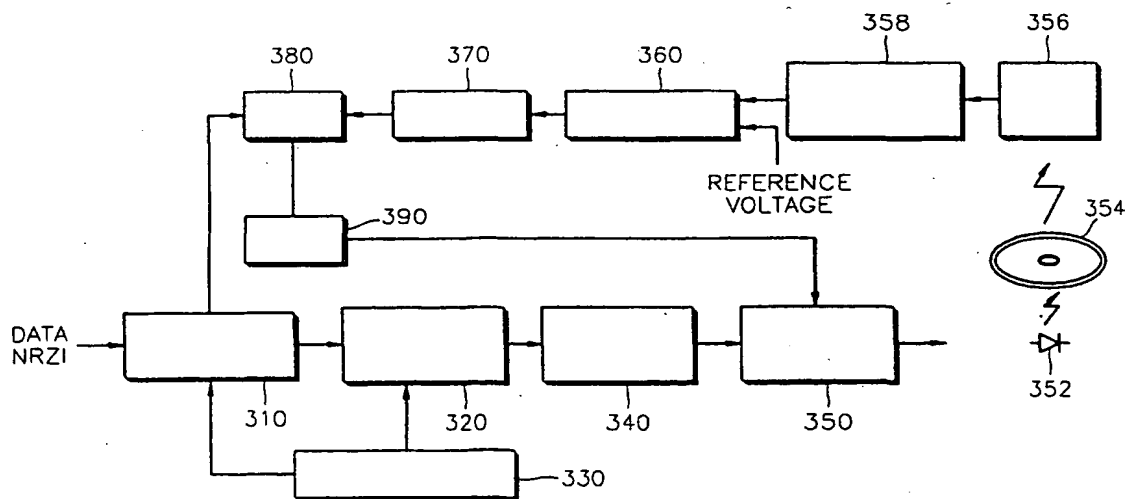

(57) Abstract

An adaptive recording method and apparatus for optimizing power of a laser diode are provided. In a method for optimizing read power, peak power and bias power for overwrite pulses and supplying the same to the laser diode, the adaptive recording method includes the steps of discriminating the mark size of input NRZI (Non Return to Zero Inversion) data, and varying power of the overwrite pulses in accordance with the discriminated mark size.

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

ADAPTIVE RECORDING METHOD AND APPARATUS FOR HIGH-DENSITY OPTICAL RECORDING APPARATUS

Technical Field

5 The present invention relates to an adaptive recording method and apparatus for a high-density optical recording apparatus, and more particularly, to an adaptive recording method and apparatus for optimizing power of a laser diode.

Background Art

10 High-capacity recording media are required in a multimedia age and optical recording apparatuses using the same include magnetic optical disc driver (MODD), digital versatile disc random access memory (DVD-RAM) driver and the like.

 These optical recording apparatuses requires an optimal system state and precision as the recording density increases. In general, if the recording capacity
15 increases, jitter of an overwrite pulse for a radial tilt increases in a direction of a time axis. Thus, it is very important to minimize the jitter for attaining high-density recording.

 FIG. 1 is a block diagram of a conventional optical recording apparatus.

 First, a recording waveform controller 120 controls recording waveforms in
20 accordance with input NRZI data. An overwrite pulse generator 140 generates overwrite pulses in accordance with an control output generated from the recording waveform controller 120. A laser diode driver 150 drives a laser diode 152 in accordance with levels of the overwrite pulses generated from the overwrite pulse generator 140. Also, a gain adjustment portion 158 adjusts a gain of an optical
25 signal input from a disc 154 through a photodiode (PD) 156. A comparator 160 compares the voltage of a signal output from the gain adjustment portion 150 with a reference voltage. A counter 170 up/down counts in accordance with the result of the comparator 160. A digital-analog converter (DAC) 180 converts up/down counted values into analog values and applies the converted values to the laser diode
30 driver 150.

 FIGS. 2A through 2E are waveform diagrams of overwrite pulses generated from the overwrite pulse generator 140 shown in FIG. 1.

Overwrite pulses of input NRZI (Non Return to Zero Inversion) data having recorded mark sizes of 3T, 5T and 11T, as shown in FIG. 2A, are formed in a state specified in the format book, as shown in FIG. 2E, and then recorded. Here, the NRZI data are divided into marks and spaces. During a period of the spaces, the laser diode is in an erase power state to thus erase existing data. Recorded marks of NRZI data composed of 3T, 4T, ..., 14T, in which the interval of each T is 1L, are recorded by changing only the size of multi-pulses without changing the numbers of the first pulse, the last pulse and the cooling pulse.

In other words, the waveforms of the overwrite pulse shown in FIG. 1E are formed by the combination of read power (FIG. 1B), peak power, which is also called write power, (FIG. 1C), and bias power, which is also called erase power (FIG. 1D).

The waveform of the overwrite pulses is the same as those of the first generation DVD-RAM standard of 2.6 giga bytes (GB). In other words, according to the 2.6 GB DVD-RAM standard, the waveform of an overwrite pulses consists of the first pulse, multi-pulse chains and the last pulse. The rising edge of the first pulse of the basic overwrite pulses is delayed by $T/2$ from the rising edge of a recorded mark. The rising edge of the first pulse can be shifted back and forth in units of 1 nano second (ns). The last pulse can also be shifted back and forth in units of 1 ns. The multi-pulse chains are divided into several short pulses to reduce thermal accumulation in the rear portion of the recorded mark, thereby suppressing deformation of recorded marks.

In the structure of such an overwrite pulse, the waveform of overwrite pulses is formed, irrespective of the preceding and following spaces.

Therefore, when forming and recording overwrite pulses formed into a constant power level, as shown in FIG. 1E, jitter may be caused in accordance with input NRZI data, because recorded marks have thermal accumulation occurring in the front or rear portions thereof, or the domain sizes formed depending on the sizes of preceding and following spaces are not constant. This may significantly degrade overall system performance. Also, this makes it difficult to use high-density DVD-RAM, for example, the second generation DVD-RAM of 4.7 GB.

Disclosure of the Invention

To solve the above problems, it is an objective of the present invention to provide a method for adaptively forming overwrite pulses in accordance with marks or spaces of input NRZI data in a high-density optical recording apparatus.

- 5 It is another objective of the present invention to provide an apparatus for adaptively forming overwrite pulses in accordance with marks or spaces of input NRZI data in a high-density optical recording apparatus.

~~To achieve the first objective, there is provided an adaptive recording method~~
in a method for optimizing read power, peak power and write power for overwrite
10 pulses and supplying the same to a laser diode, the adaptive recording method comprising the steps of (a) discriminating the mark size of input NRZI data, and (b) varying power of the overwrite pulse in accordance with the discriminated mark size. In step (b), power levels of the laser diode is varied based on levels of the write power controlled an automatic laser power control (ALPC).

- 15 According to another aspect of the present invention, there is provided an adaptive recording apparatus in an apparatus for controlling power of a laser diode, the adaptive recording apparatus comprising a discriminator for discriminating the mark size of input data or relationship between preceding and following spaces and outputting different power levels accordingly, a generator for controlling the
20 waveform of overwrite pulses in accordance with the input data to generate overwrite pulses, and a laser diode driver for converting differentiated value between the value of the power level output from the discriminator and a reflected optical signal level into a current signal, and adaptively driving the laser diode in accordance with the mark size.

25

Brief Description of the Drawings

The above objectives and advantages of the present invention will become more apparent by describing in detail a preferred embodiment thereof with reference to the attached drawings in which:

- 30 FIG. 1 is a block diagram illustrating a conventional optical recording apparatus;

FIGS. 2A through 2E are waveform diagrams of overwrite pulses generated

from an overwrite pulse generator shown in FIG. 1;

FIG. 3 is a block diagram illustrating an adaptive recording apparatus for a high-density optical recording apparatus according to the present invention; and

FIGS. 4A through 4F are waveform diagrams of adaptive overwrite pulses recorded by an adaptive recording apparatus shown in FIG. 3.

Best mode for carrying out the Invention

Hereinafter, a preferred embodiment of an adaptive recording method and apparatus for a high-density optical recording apparatus according to the present invention will be described with reference to the accompanying drawings.

FIG. 3 is a block diagram of an adaptive recording apparatus for a high-density optical recording apparatus according to the present invention, which includes a data discriminator 390, a recording waveform controller 320, a microcomputer 330, an overwrite pulse generator 340, a laser diode driver 350, a laser diode 352, a disc 354, a photodiode 356, a gain adjustment portion 358, a comparator 360, a counter 370, an adder 380, and a DAC 390. Here, the laser diode driver 350, the laser diode 352, the disc 354, the photodiode 356, the gain adjustment portion 358, the comparator 360, the counter 370, the adder 380, and the DAC 390 are related to a reflected optical signal and perform auto laser-diode control (ALPC).

FIGS. 4A through 4F are waveform diagrams of adaptive overwrite pulses recorded by the adaptive recording apparatus shown in FIG. 3, in which FIG. 3A shows a waveform of NRZI data, FIG. 3B shows read power, FIG. 3C shows peak power (or write power), FIG. 3D shows bias power (or erase power), FIG. 3E shows a waveform of overwrite pulses, and FIG. 3F shows a waveform of overwrite pulses newly added with write powers 1, 2 and 3.

Next, the operation of the apparatus shown in FIG. 3 will be described.

In FIG. 3, the data discriminator 310 having tables in which different optimal power level data for 3T, 4T, ... 14T are stored for the respective marks depending on the mark size (T) or the relationship between preceding and following spaces receives NRZI data divided into marks and spaces, discriminates the mark size (T) or the relationship between preceding and following spaces and outputs the power level data

to the adder 380. Here, the optimal power level data corresponding to the mark size and space size are selected and stored in the form of binary data in the table. The microcomputer 330 sets an initial value of the optimized power level data in the table of the data discriminator 310 in accordance with the mark size or the relationship
5 between preceding and following spaces or initializes the recording waveform controller 320. Also, the microcomputer 330 initializes discriminating conditions and table values of the data discriminator 310 and updates the data into the optimal level data. The recording waveform controller 320 outputs recording waveform control signals, i.e., the read power shown in FIG. 4B, the peak power shown in
10 FIG. 4C and the bias power shown in FIG. 4D, in accordance with the NRZI data input from the data discriminator 310, as shown in FIG. 4A,.

The overwrite pulse generator 340 generates overwrite pulses shown in FIG. 4E in accordance with pulsewidth data controlling the waveform of the overwrite pulses applied from the recording waveform controller 320 and applies a control
15 signal for controlling the flow of current for each channel (read, peak or bias channel) for the overwrite pulses to the laser diode driver 350.

The laser diode driver 350 converts the driving levels of each input power of read, peak and bias channels into current signals based on a control signal for controlling the current flow for the respective channels output from DAC 390 to
20 drive the laser diode 352. The laser diode 352 applies an optical signal to the disc 354. At the same time, the optical signal reflected from the disc 354 is received in the photodiode 356 which is a light receiving element. The gain adjustment portion 358 adjusts the voltage level of the optical signal received by the photodiode 356. The comparator 360 compares the voltage level with a reference voltage level. Here,
25 the reference voltage level varies in accordance with an operating mode, i.e., a read mode, an erase mode or write mode. The counter 370 down-counts if the optical signal level is greater than a reference level, and up-counts if the optical signal level is less than the reference level.

The adder 380 differentiates power level data output from the discriminator
30 310 from the counted value corresponding to the power level for the reflected optical signal generated from the counter 370, and outputs the power level data to be added for the corresponding mark. The DAC 390 converts the power level data output

from the adder 380 to a current level for driving the laser diode. The current level corresponds to the current for driving the laser diode and is applied to the laser diode driver 350. Here, the laser diode driver 350, the laser diode 352, the disc 354, the photodiode 356, the gain adjustment portion 358, the comparator 360, the counter 5 370, the adder 380, and the DAC 390 form a loop for performing auto laser-diode control (ALPC).

Thus, the write power levels of the last recording waveform applied to the laser diode driver 350 adaptively vary in accordance with mark size (T), as shown in FIG. 4F. The levels denoted by (1), (2) and (3) of FIG. 4F indicate power levels 10 of 3T, 5T and 11T, respectively. In FIG. 4F, the y-axis indicates power (mW) and the x-axis indicates time (t). For example, the waveforms of (1), (2) and (3) may be set to 10 mW, 11 mW and 12 mW, respectively. As shown in FIG. 4F, the write power levels are different by a predetermined magnitude in accordance with the sizes of the respective marks, i.e., 3T, 5T and 11T. In other words, the powers of 10 15 mW, 11 mW and 12 mW are generated at 3T, 5T and 11T, respectively.

Also, if one or arbitrary level of (1), (2) and (3) levels shown in FIG. 4F is set to a reference control level of ALPC, the power levels of the laser diode are adaptively varied by decreasing or increasing the same from the reference control level in accordance with input NRZI data.

20 As described above, according to the present invention, the size of the domain becomes uniform by varying the output level of the recording pulse waveform according to the size T of the mark of the input NRZI data or the relationship of the proceeding and following spaces. Thus, jitter is minimized and reliability and performance of the system can be improved.

25

Industrial Applicability

The present invention is not limited to the above-described embodiment and various modifications and changes may be effected by one skilled in the art within the scope of the present invention. In other words, the present invention can be 30 applied to most high-density optical recording apparatuses using the waveform of adaptive overwrite pulses newly proposed in the present invention.

What is claimed is:

1. An adaptive recording method in a method for controlling power of a laser diode, comprising the steps of:

- 5 (a) setting different levels of write power in accordance with the mark size and the relationship between preceding and following spaces; and
- (b) adaptively varying power of the laser diode for input data by differentiating power levels set for each mark or space in step (a) from a power of a reflected signal.
-

10 2. The adaptive recording method according to claim 1, wherein the power level of step (a) increases in a constant ratio in accordance with the mark size of 3T-14T.

3. The adaptive recording method according to claim 1, wherein in step
15 (b), the power level of the laser diode is varied based on the recording power level controlled by auto laser diode power control (ALPC).

4. An adaptive recording method in a method for optimizing read power, peak power and bias power for overwrite pulses and supplying the same to a laser
20 diode, the adaptive recording method comprising the steps of:

- (a) discriminating the mark size of input NRZI (Non Return to Zero Inversion) data; and
- (b) varying power of the overwrite pulses in accordance with the discriminated mark size.

25

5. An adaptive recording apparatus in an apparatus for controlling power of a laser diode, the adaptive recording apparatus comprising:

a discriminator for discriminating the mark size and the relationship between preceding and following spaces of input data and setting different power levels;

30 a generator for generating overwrite pulses by controlling the waveform of the overwrite pulses in accordance with the input data; and

a laser diode driver for adaptively driving the laser diode in accordance with

the mark size by converting differentiated value between the power level set by the discriminator value and levels of reflected optical signals into current signals.

6. The adaptive recording apparatus according to claim 5, wherein the discriminator contains a table in which different power level data for 3T~14T are stored.

~~7. The adaptive recording apparatus according to claim 6, wherein the data stored in the table are updated into the optimal power level data.~~

10

8. The adaptive recording apparatus according to claim 5, wherein the laser diode driver comprises:


an adder for differentiating the power level data corresponding to the mark size output from the discriminator from reflected optical signal level data;

15 a digital-analog converter (DAC) for converting the data output from the adder into an analog control current signal; and

a laser diode driver for driving the laser diode by the control current signal supplied from the DAC.

1/4

FIG. 1

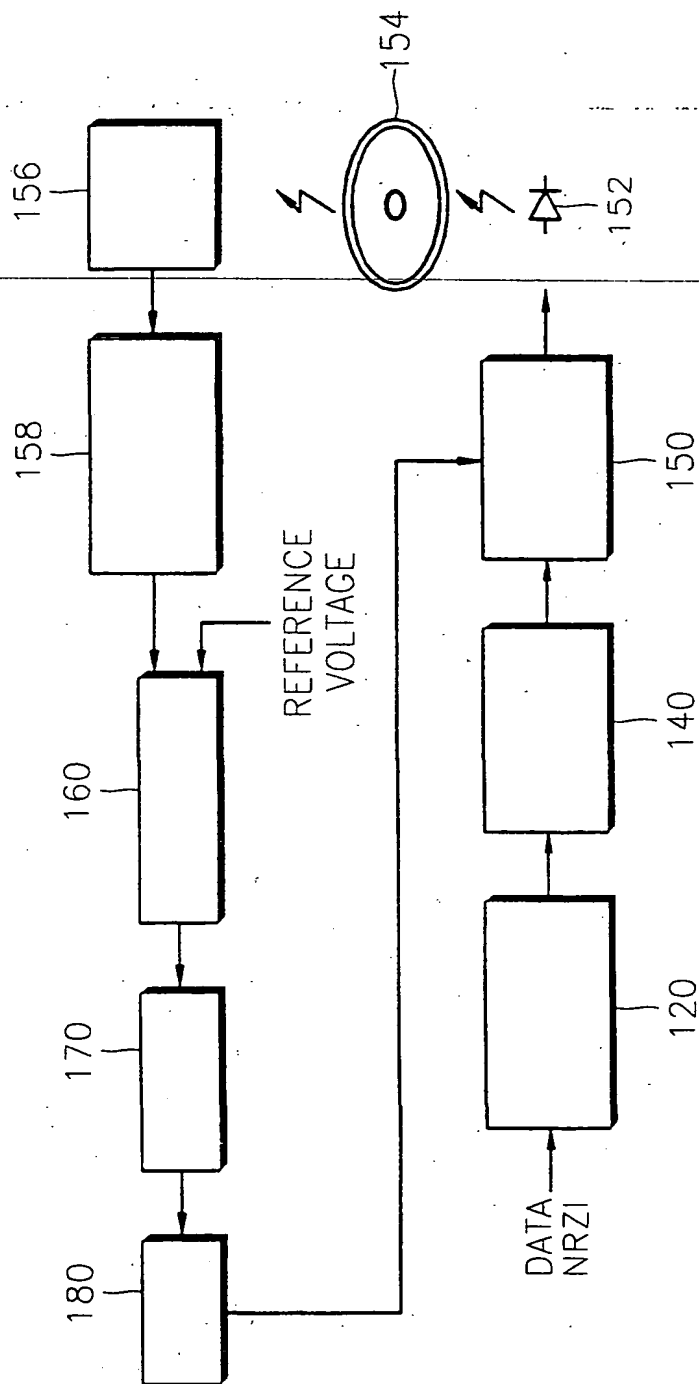

2/4

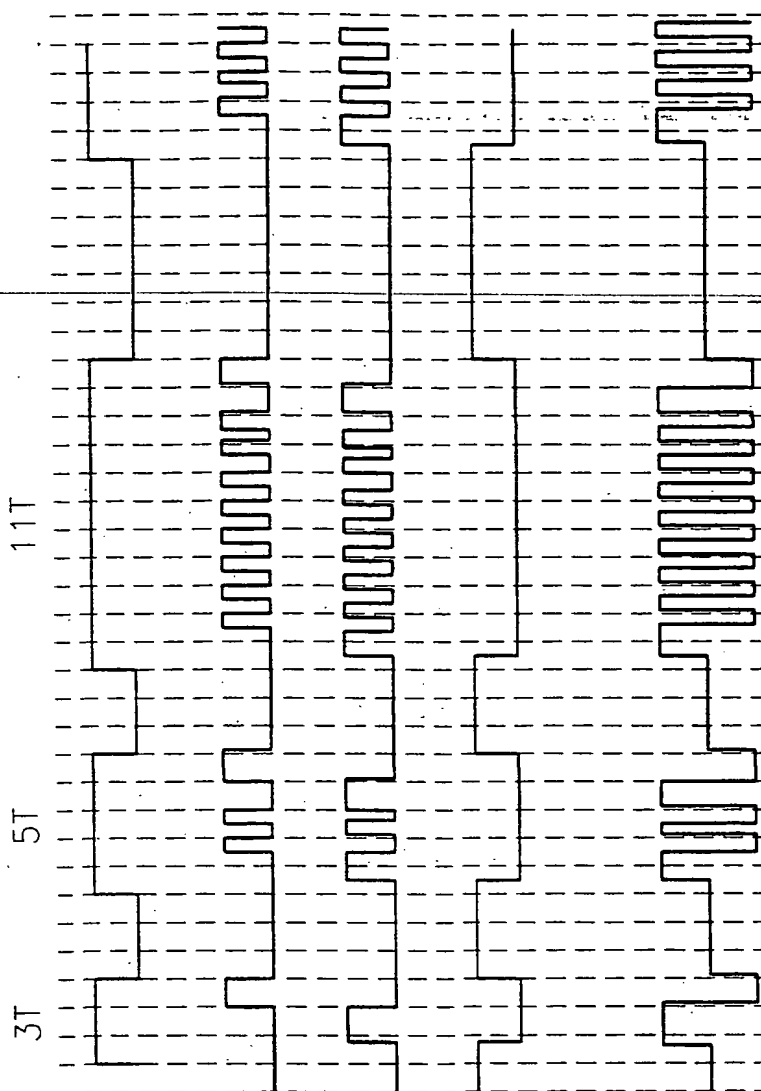


FIG. 2A


FIG. 2B

FIG. 2C

FIG. 2D

FIG. 2E

FIG. 3

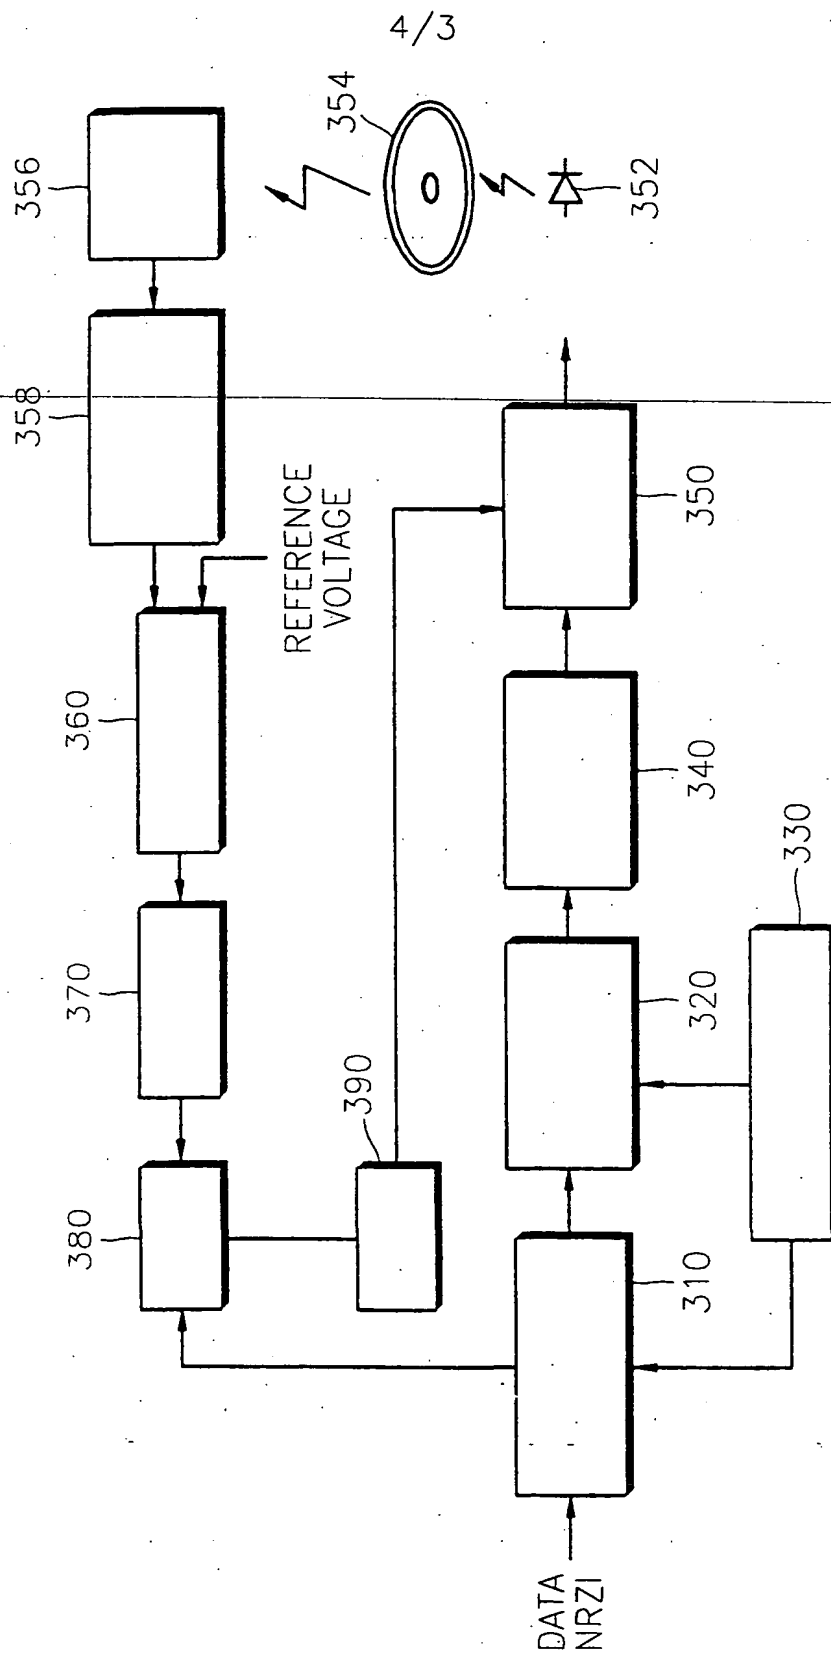

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR 99/00164

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche		Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets		Datum der Veröffentlichung Publication date Date de publication
US A	5469422	21-11-1995	JP A2	6215375	05-08-1994
			JP B2	2674453	12-11-1997
EP A2	595625	04-05-1994	EP A3	595625	22-05-1996
			JP A2	6301979	28-10-1994
			US A	5577019	19-11-1996
			US A	5581535	03-12-1996
EP A2	256827	24-02-1988	AT E	84375	15-01-1993
			DE C0	3783406	18-02-1993
			DE T2	3783406	09-06-1993
			EP A3	256827	04-01-1989
			EP B1	256827	07-01-1994
			HK A	959795	23-06-1996
			JP A2	63046633	27-02-1988
			JP B4	7111782	29-11-1996
			KR B1	9513701	13-11-1995
			US A	4796250	03-01-1989

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.